

## Series 1 Drip Leg Automatic Drain


**Application:**

- Used in compressed air systems to automatically expel liquids from piping systems. Installed at low points in piping and at end of pipe network where water is likely to accumulate.

**Features:**

- metal bowl
- drain is ported to 1/8" NPT
- inlet pressure: **250 PSIG**
- maximum temperature: **175°F**

Port Size	Part #	Price/E
1/2"	<b>17-016-107</b>	<b>\$306.50</b>

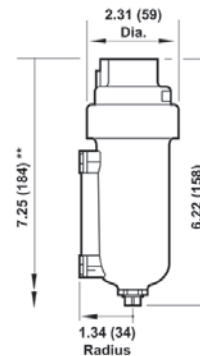

\*\* Minimum clearance to remove bowl.

## Hex Nipples

**Feature:**

- ref SAE 130137




NPTF Thread	Brass Part #	Price/E	Opt Qty
1/8" x 1/8"	<b>BCN12</b>	<b>\$2.53</b>	100
1/4" x 1/4"	<b>BCN25</b>	<b>2.81</b>	100
3/8" x 3/8"	<b>BCN37</b>	<b>4.09</b>	50
1/2" x 1/2"	<b>BCN50</b>	<b>5.70</b>	25
3/4" x 3/4"	<b>BCN75</b>	<b>7.50</b>	20
1" x 1"	<b>BCN100</b>	<b>18.00</b>	10

## Close Nipples

**Features:**

- Stainless steel close nipples are available on page 742.
- Brass close nipples are available on pages 344 and 365.



Size	Carbon Steel Part #	Price/E	Opt Qty
1" x 1"	<b>CN100</b>	<b>\$3.50</b>	10
1 1/4" x 1 1/4"	<b>CN125</b>	<b>4.40</b>	10
1 1/2" x 1 1/2"	<b>CN150</b>	<b>5.50</b>	10
2" x 2"	<b>CN200</b>	<b>7.45</b>	10



Do not use pipe nipples as hose inserts.